


Temperature Stabilized Antenna

GPS/GLONASS/WAAS - L1/L2 Antenna System

System Configuration

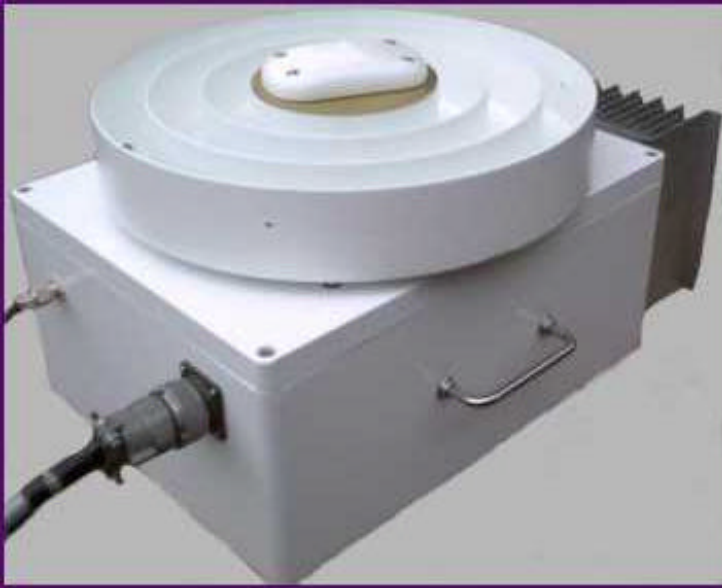

Antenna/pre-amp/choke ring package

Antenna Unit

- L1/L2 GPS/GLONASS/WAAS antenna
- Choke ring
- Temperature controlled pre-amp
- Waterproof enclosure



Remote temperature control unit

Temperature Control Unit

- Independent control and display of Antenna Unit temperatures
- Percent cooling display

Features

- L1/L2 GPS/GLONASS/WAAS antenna.
- Two thermal control zones with fully independent heating and cooling capability.
- Weather-proof enclosure.

Accuracy

- <2ns group delay variation over -20°C to +50°C ambient temperature range.

Thermal Operating Range

- Ambient temperature: -20°C to +50°C.
- Primary zone: +35°C to +50°C, user selected.
- Secondary zone: +20°C to +30°C, user selected.
- Pre-amp temperature maintained within $\pm 0.5^\circ\text{C}$ of set point.

Dimensions

- Antenna Unit: 21 in x 15.5 in x 12 in (53.3 cm x 39.4 cm x 30.5 cm)
- Temperature Control Unit: 20 in x 19 in x 5.5 in (50.8 cm x 48.3 cm x 14 cm)

Weight

- Antenna Unit: 55 lbs (25 kg)
- Temperature Control Unit: 16 lbs (7.3 kg)

System Power

- 110/220 VAC operation, transformer isolated
- 110 – 130, or 200 – 250 VAC operation, switch selectable
- 1 Amp max. at 110 VAC

Availability

- Systems configured to your specific requirements are available 30 to 90 days ARO.

Specifications are subject to change without notice

Contact:

Mira Vista Technologies
/AACE Industries
PO Box 7621
Laguna Niguel, CA 92607

Tel (949) 481-1239
Fax (949) 203-2816
E-mail: Info@miravistatech.com
Web: MiraVistaTech.com
3Snavigation.com